

# 15FCX76

## Coaxials - 15.0 Inches

800 W continuous program power capacity  
 80° nominal coverage  
 40 - 18000 Hz response  
 98 dB sensitivity  
 50.5 mm (2") HF unit exit diameter



### Specifications

Nominal diameter	380 mm (15.0 in)
Nominal impedance	8 Ω
Minimum impedance lf	6.0 Ω
Minimum impedance hf	7.8 Ω
Frequency range	40 - 18000 Hz
Dispersion angle <sup>1</sup>	80 °
Magnet material	Ceramic

### Specifications LF Unit

LF Sensitivity <sup>2</sup>	98.0 dB
LF Nominal Power Handling <sup>3</sup>	400 W
LF Continuous Power Handling <sup>4</sup>	800 W
LF Voice Coil Diameter	76 mm (3.0 in)
LF Winding Material	Copper

### Specifications HF Unit

HF Sensitivity <sup>5</sup>	105.0 dB
HF Nominal Power Handling <sup>6</sup>	80 W
HF Continuous Power Handling <sup>7</sup>	160 W
HF Voice Coil Diameter	75 mm (3.0 in)

### Specifications HF Unit

HF Winding Material	Aluminium
Diaphragm material	Titanium
Recommended crossover <sup>8</sup>	1.2 kHz

### Parameters

Fs	40 Hz
Re	5.2 Ω
Qes	0.47
Qms	8.3
Qts	0.44
Vas	187.0 dm <sup>3</sup> (6.6 ft <sup>3</sup> )
Sd	855.0 cm <sup>2</sup> (132.5 in <sup>2</sup> )
η <sub>o</sub>	2.5 %
Xmax	6.5 mm
Xvar	7.5 mm
Mms	87 g
Bl	15.6 Txm
Le	1.2 mH
EBP	85 Hz

### Mounting And Shipping Info

Overall diameter	393 mm (15.5 in)
Bolt circle diameter	374 mm (16.7 in)
Baffle cutout diameter	353 mm (13.9 in)
Depth	199 mm (7.83 in)
Flange and gasket thickness	16 mm (0.62 in)
Net weight	9.0 kg (19.8 lb)
Shipping units	1
Shipping weight	9.7 kg (21.4 lb)
Shipping box	446x439x253 mm (17.5x17.3x10 in)

### Service Kit

Service kit lf	RCK15FCX768
Replacement diaphragm	MMD3BTN8M

1. Included by -6 dB down points.

2. Applied RMS Voltage is set to 2.83V.


3. 2 hours test made with continuous pink noise signal (6 dB crest factor) within the range Fs-10Fs. Power calculated on rated minimum impedance. Loudspeaker in free air.

5. Applied RMS Voltage is set to 2.83V.




6. 2 hour test made with continuous pink noise signal (6 dB crest factor) within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated minimum impedance. Loudspeaker in free air.

7. Power on Continuous Program is defined as 3 dB greater than the Nominal rating.

4. Power on Continuous Program is defined as 3 dB greater than the Nominal rating.

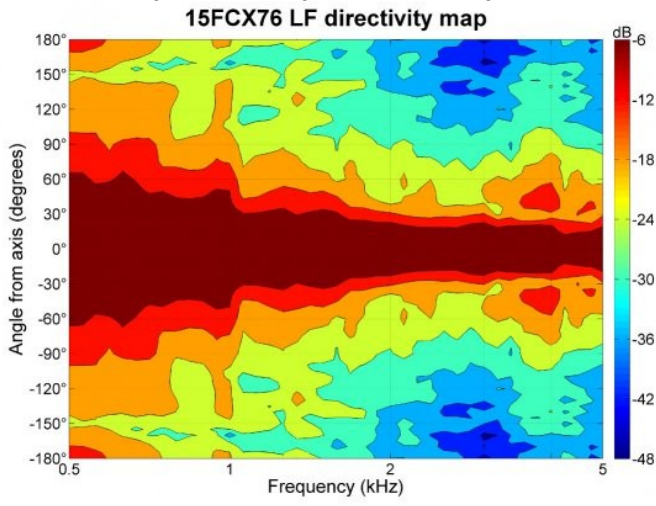

8. 12 dB/oct. or higher slope high-pass filter.

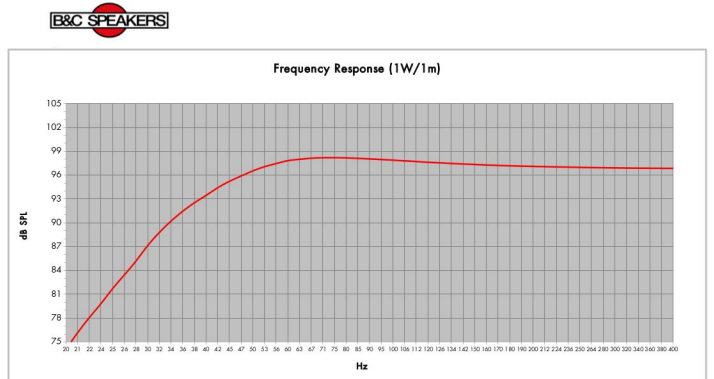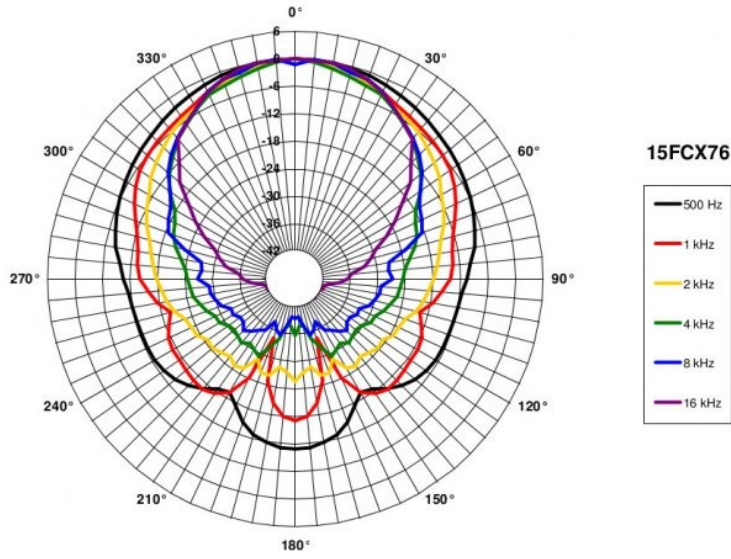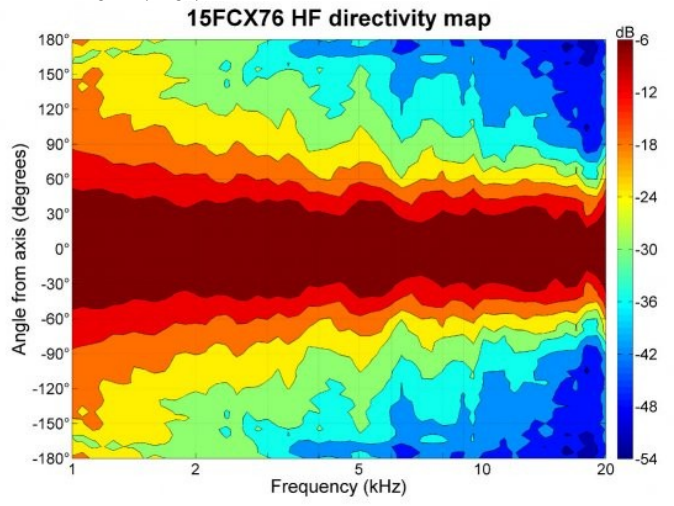

Model:	<b>15FCX76</b>	Configuration:	<b>One Driver</b>
Enclosure Type:	<b>Basin Reflex</b>	Q <sub>B</sub> :	<b>7</b>
Internal Net Volume (Liters):	<b>160</b>	Port Area (cm <sup>2</sup> ):	<b>277,5</b>
Tuning Frequency (Hz):	<b>40</b>	Port Length (cm):	<b>16,1</b>
Frequency (-3 dB) (Hz):	<b>40,8</b>		