

HF64

PRO HF HORN

DESCRIPTION

1-inch/1.4 inch Throat Adaptor. 60° x 40° Constant Directivity Coverage. Thick Aluminum Body for best heat dissipation in conjunction to Neodimium Compression Drivers.



FEATURES

- 1-inch/1.4 inch Throat Adaptor
- 60° x 40° Constant Directivity Coverage
- Loading down to 500 Hz
- Thick Aluminum Body for best heat dissipation in conjunction to Neodimium Compression Drivers
- Perfectly Controlled Dispersion


TECHNICAL SPECIFICATIONS

General specifications	Throat Diameter:	25-36 mm / 1.0-1.4 inch
	Horizontal coverage angle:	60°
	Vertical coverage angle:	40°
	Cut-off Frequency:	500 Hz
	Material:	Aluminium
Mounting informations	Overall height:	250 mm / 9.84 inches
	Overall width:	25 mm / 0.98 inches
	Overall depth:	179 mm / 7.05 inches
	Baffle Cut-out height:	205 mm / 8.07 inches
	Baffle Cut-out width:	205 mm / 8.07 inches
	Mounting:	4 x 7 mm holes, interaxes 101 mm/76 mm
Standard compliance	CE marking:	Yes
Size	Height:	186 mm / 7.32 inches
	Diameter:	250 mm / 9.84 inches
	Weight:	1.48 kg / 3.26 lbs
Shipping informations	Package Height:	195 mm / 7.68 inches
	Package Width:	265 mm / 10.43 inches
	Package Depth:	260 mm / 10.24 inches
	Package Weight:	2.4 kg / 5.29 lbs



PART NUMBER

- **13133046**


HF64

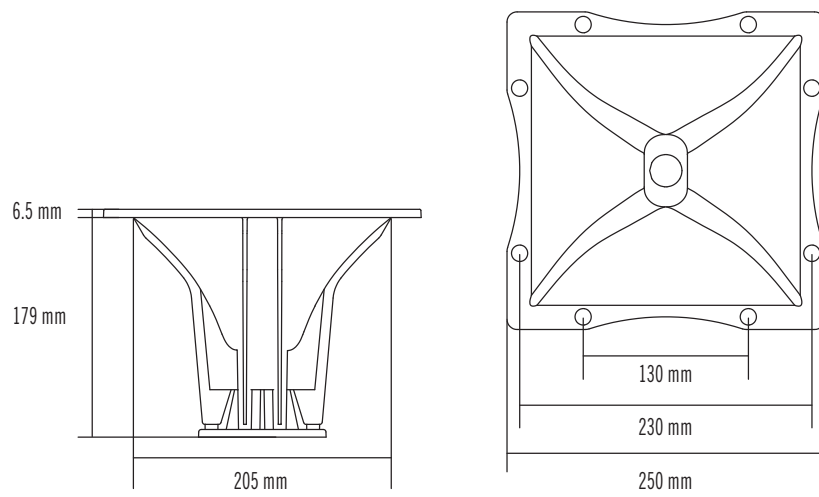


Response 1W/1m

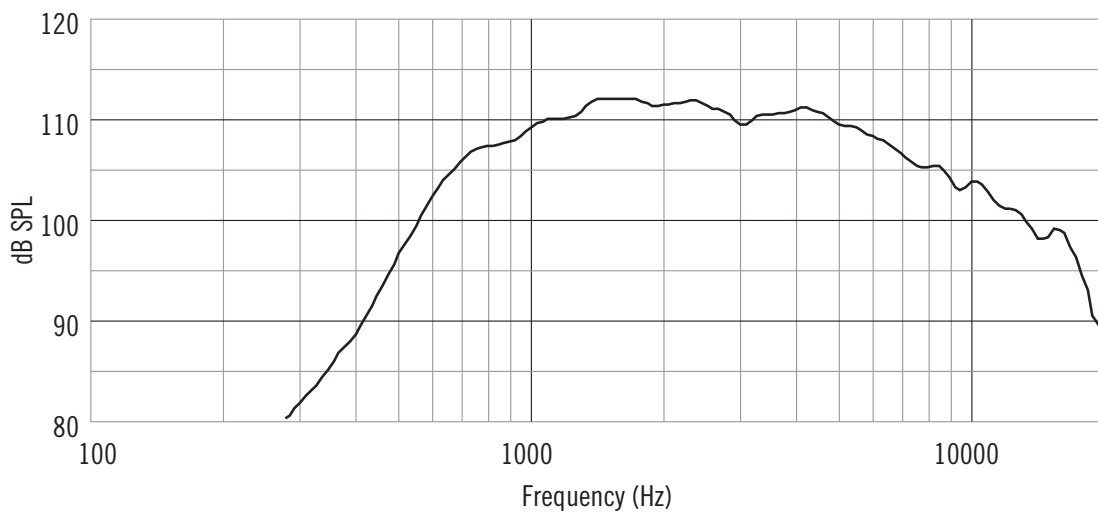


Horizontal 2000 Hz
1/3 Octave Polars




Horizontal 4000 Hz
1/3 Octave Polars




Horizontal 8000 Hz
1/3 Octave Polars



Vertical 2000 Hz
1/3 Octave Polars



Vertical 4000 Hz
1/3 Octave Polars



Vertical 8000 Hz
1/3 Octave Polars